




SunSpring Mini UF Specifications

Items	UF100LS-S2
Fiber External Diameter (mm)	0.72
Membrane Area	2 m ² / 23 ft ²
Module Diameter (mm)	90 mm / 3.5 "
Module Length (mm)	260 mm / 10.2 "
Connections	IN and OUT- ½" NPT
Molecular Weight Cut off (da)	100,000
or pore size (µm)	0.01
Pure Water Flow at 0.5 bar at 20°C	250 l/h / 1.1 gpm
Maximal Transmembrane Pressure (bars at 20°C)	2.5
Maximal Feed Pressure (bars)	3
Membrane Material	Polysulfone
Potting Material	Polyurethane
Vessel Material	U-PVC
Maximal Operating Temperature	35 °C
Operating pH Range	2-12

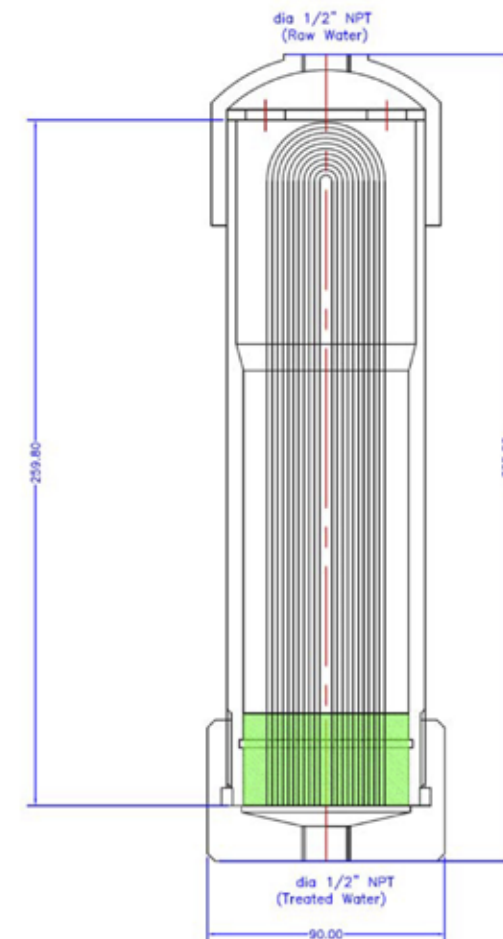

IWT: 29625 Industrial Park Rd. Rocky Ford, CO 81067

phone : (719) 254-4426 - fax : (719) 254-4427 - sales@innovativeh2o.com - www.innovativeh2o.com